





# Timing Belt False Tooth - Cleat Attachment




**Full False Tooth**






**Cleat Attached**

- **Strong** mechanical threaded false tooth, can handle much higher loads than welded profiles.
- **Construction** of the false tooth is typically made of stainless steel but can be made of other materials.
- **Economical** because you can replace worn cleats without replacing the entire belt.
- **Versatile** because cleats of different construction can be bolted through the belt. (steel, stainless steel, urethane, UHMW, plastic, wood)
- **Flexible** design, allows changing of cleats positions on predetermined centers. More readily available than welded on urethane cleats.
- **Custom** false tooth and cleats can be manufactured to your specifications.
- **Exact** cleat spacing, accurately positioned over the tooth.



**Inset False Tooth**

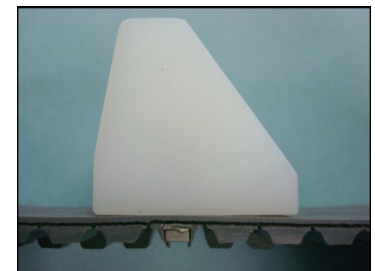

**Cleat Attached**

**F.N. SHEPPARD & CO.**  
*Belting Specialties*

[www.fnsheppard.com](http://www.fnsheppard.com)

800-733-5773

Erlanger, KY  
Charlotte, NC  
Jackson, TN  
Louisville, KY  
Oshkosh, WI  
Woodbury, NJ  
Maple Grove, MN

859-525-2358  
704-295-1040  
731-427-7440  
502-499-8599  
920-233-7070  
859-653-3857  
859-250-2144

Fax 859-525-8467  
Fax 704-295-0145  
Fax 731-423-3013  
Fax 502-499-7330  
Fax 920-233-7202  
Fax 856-384-8415