


# Belt # XBE2A9

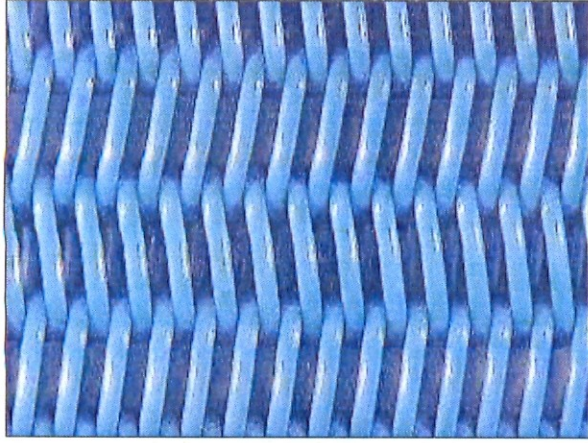

## 100% Monofilament Spiral Fabric with Improved Hydrolysis Resistance

### Product Strengths

- Co-extruded Poly/Teflon Spiral Fabrics
- Improved hydrolysis resistance
- Superior abrasion resistance
- Smooth surface and high contact
- Cleanest running design
- Maximum dimensional stability and strength
- Retains permeability throughout life

### Design Specifications

- Poly/Teflon 7PT                      CFM: 900
- 16 PLI @ 300° F
- 500 PLI Breaking Strength
- Max Operating Temp. 415° F
- Weight .279 lbs/ft<sup>2</sup>
- Permeability is achieved with solid ribbon stuffers
- No seam is required, the fabric ends are joined together at the time of installation

**F.N. SHEPPARD & CO.**  
**Belting Specialties**

[www.fnsheppard.com](http://www.fnsheppard.com)      800-733-5773

1261 Jamike Dr.  
10924 Granite St. Ste 300  
161 Pinnacle Dr.  
10101 Bunsen Way  
4070 State Road 91

Sales Offices:

Erlanger, KY  
Charlotte, NC  
Jackson, TN  
Louisville, KY  
Oshkosh, WI  
Woodbury, NJ  
Maple Grove, MN

859-525-2358 • Fax 859-525-8467  
704-295-1040 • Fax 704-295-0145  
731-427-7440 • Fax 731-423-3013  
502-499-8599 • Fax 502-499-7330  
920-233-7070 • Fax 920-233-7202  
859-653-3857 • Fax 856-384-8415  
859-250-2144