


Belt # X02A11

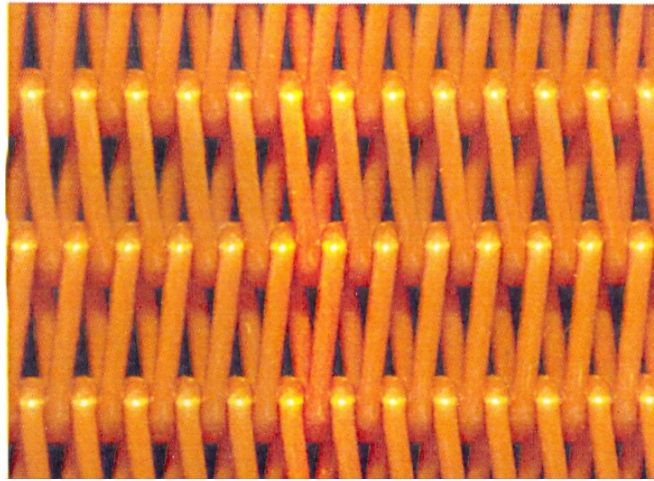

100% Monofilament Spiral Fabric with Improved Contamination Resistance

Product Strengths

- Co-extruded Poly/Teflon Spiral Fabrics
- Improved contamination resistance
- Smooth surface and high contact
- Clean running
- Maximum dimensional stability and strength
- Retains permeability throughout life

Specifications

- Poly/Teflon 105PT
- CFM: 1200
- MD (machine direction) yarn dia. .105 mm
- CD (cross direction) yarn dia. .9 to .105 mm
- Estimated overall thickness (measured) 3.8 mm
- Min. Pulley: 4" Dia.
- Max Operating Temp: 400°F
- Normal Working Tension: 12-18 pli
- Lower Permeability is achieved with monofilament stuffers
- No seam is required, the fabric ends are joined together at the time of installation

F.N. SHEPPARD & CO.
Belting Specialties

www.fnsheppard.com 800-733-5773

Erlanger, KY	859-525-2358	Fax 859-525-8467
Charlotte, NC	704-295-1040	Fax 704-295-0145
Jackson, TN	731-427-7440	Fax 731-423-3013
Louisville, KY	502-499-8599	Fax 502-499-7330
Oshkosh, WI	920-233-7070	Fax 920-233-7202
Woodbury, NJ	859-653-3857	Fax 856-384-8415
Maple Grove, MN	859-250-2144	