


Belt # XTN2A9

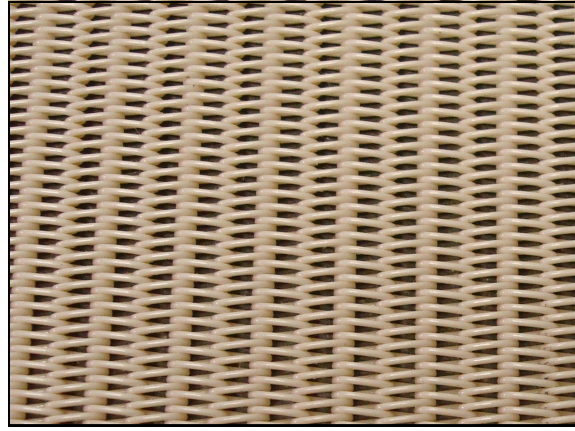

100% Monofilament Spiral Fabric with Improved Hydrolysis Resistance

Product Strengths

- Improved hydrolysis resistance
- Superior abrasion resistance
- Smooth surface and high contact
- Cleanest running design
- Maximum dimensional stability and strength
- Retains permeability throughout life

Design Specifications

- Polyester Monofilament 6HT **CFM: 900**
- 500 PLI Breaking Strength
- Max Operating Temp. 450° F
- Permeability is achieved with solid ribbon stuffers
- No seam is required, the fabric ends are joined together at the time of installation

F.N. SHEPPARD & CO.
Belting Specialties

www.fnsheppard.com 800-733-5773

| | | |
|-----------------|--------------|------------------|
| Erlanger, KY | 859-525-2358 | Fax 859-525-8467 |
| Charlotte, NC | 704-295-1040 | Fax 704-295-0145 |
| Jackson, TN | 731-427-7440 | Fax 731-423-3013 |
| Louisville, KY | 502-499-8599 | Fax 502-499-7330 |
| Oshkosh, WI | 920-233-7070 | Fax 920-233-7202 |
| Woodbury, NJ | 859-653-3857 | Fax 856-384-8415 |
| Maple Grove, MN | 859-250-2144 | |