



TECHNICAL FEATURES

- Allows very fast belts' replacement, directly on machinery
- Reduced load capacity when compared to standard joined belts
- The back of the belt is virtually flat
- Max suggested speed is 120m/min

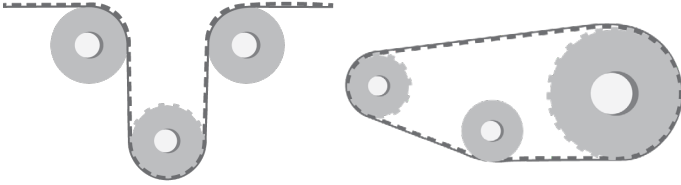

BPS TIMING BELT SPLICE

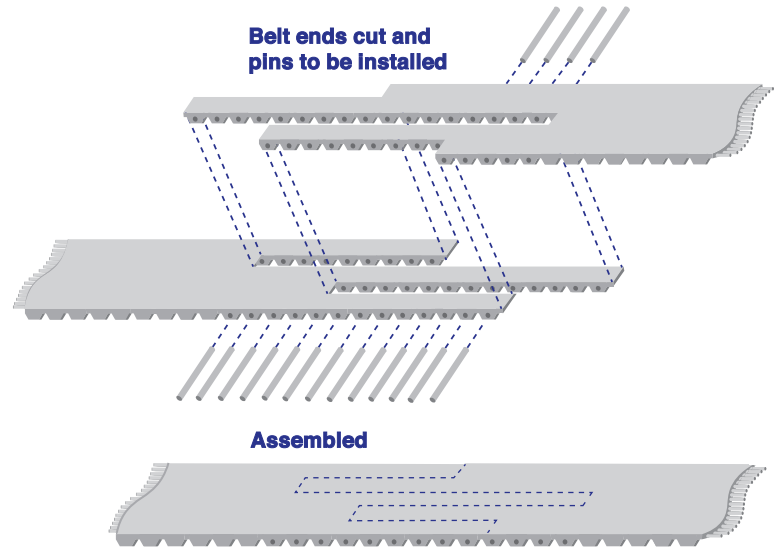

BELT PITCH & WIDTH	BELT WIDTH [MM]	SPLICE LENGTH [MM]	MAX STATIC LOAD [N]	SPLICE NUMBER OF FINGERS [NF]	MIN. INTERNAL PULLEY [ZMIN]	MIN. INSIDE IDLER [MM]	MIN. OUTSIDE IDLER [MM]
T10-25	25	180	510	4	12	60	60
T10-32	32	220	660	5	12	60	60
T10-50	50	220	1020	6	12	60	60
T10-50 w/ V-guide	50	220	760	5	25	80	80
T10-75	75	240	1150	7	12	60	60
T10-100	100	320	1530	9	12	60	60
T20-32	32	260	980	4	15	120	120
T20-50	50	320	1530	4	15	120	120
T20-75	75	340	2300	6	15	50	120
AT10-25	25	180	740	4	15	50	120
AT10-32	32	220	950	5	15	50	120
AT10-50	50	220	1480	6	15	50	120
AT10-50 W/ V-guide	50	220	1100	5	25	120	100
AT10-75	75	240	1670	7	15	50	120
AT10-100	100	320	2220	9	15	50	120
AT20-32	32	260	1420	4	18	120	180
AT20-50	50	320	2210	4	18	120	180
AT20-75	75	340	3310	6	18	120	180
HTD8-20	20	128	540	4	20	N/A	100
HTD8-30	30	176	810	5	20	N/A	100
HTD8-50	50	176	1340	6	20	N/A	100
HTD8-85	85	192	1710	7	20	N/A	100
HTD8-100	100	256	2010	9	20	N/A	100
HTD14-55	55	180	2725	4	26	120	180
RPP8-20	20	128	610	4	18	N/A	100
RPP8-30	30	176	920	5	18	N/A	100
RPP8-50	50	176	1520	6	18	N/A	100
RPP8-85	85	192	1940	7	18	N/A	100
RPP8-100	100	256	2280	9	18	N/A	100
H-200 w/ V-guide	50.8	152.4		5			