

LIVE ROLLER BELTS

F.N. Sheppard & Co.
Belting Specialties



FLVR-60AA



FLRB-50AA




FUK-3R



FLVR-60A

FLVR-60AA

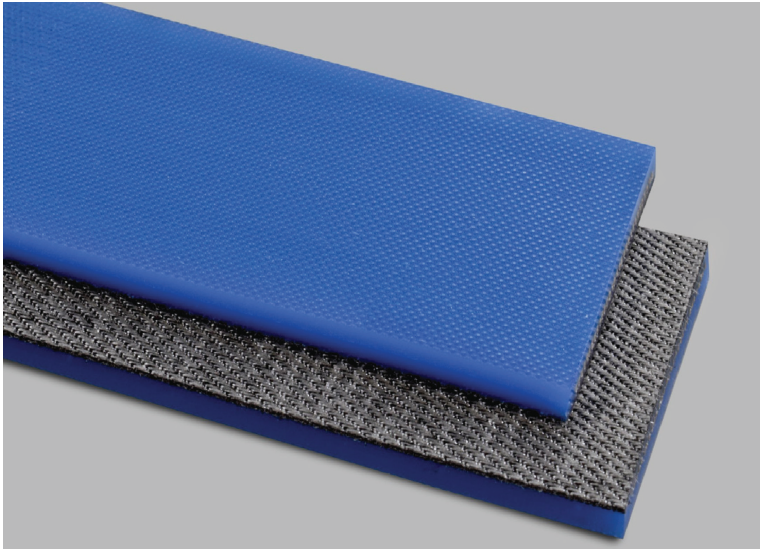

TOP VIEW



BOTTOM VIEW



GAUGE

4.5 mm

BELT WIDTH

45 mm

TOP SURFACE

Blue TPU

BOTTOM SURFACE

Polyamide Fabric

TENSILE MEMBER

Aramid Cords

TENSILE STRENGTH

700 N/mm

MIN. PULLEY DIAMETER


110 mm

STANDARD ELONGATION

0.5%


ANTI-STATIC

Yes

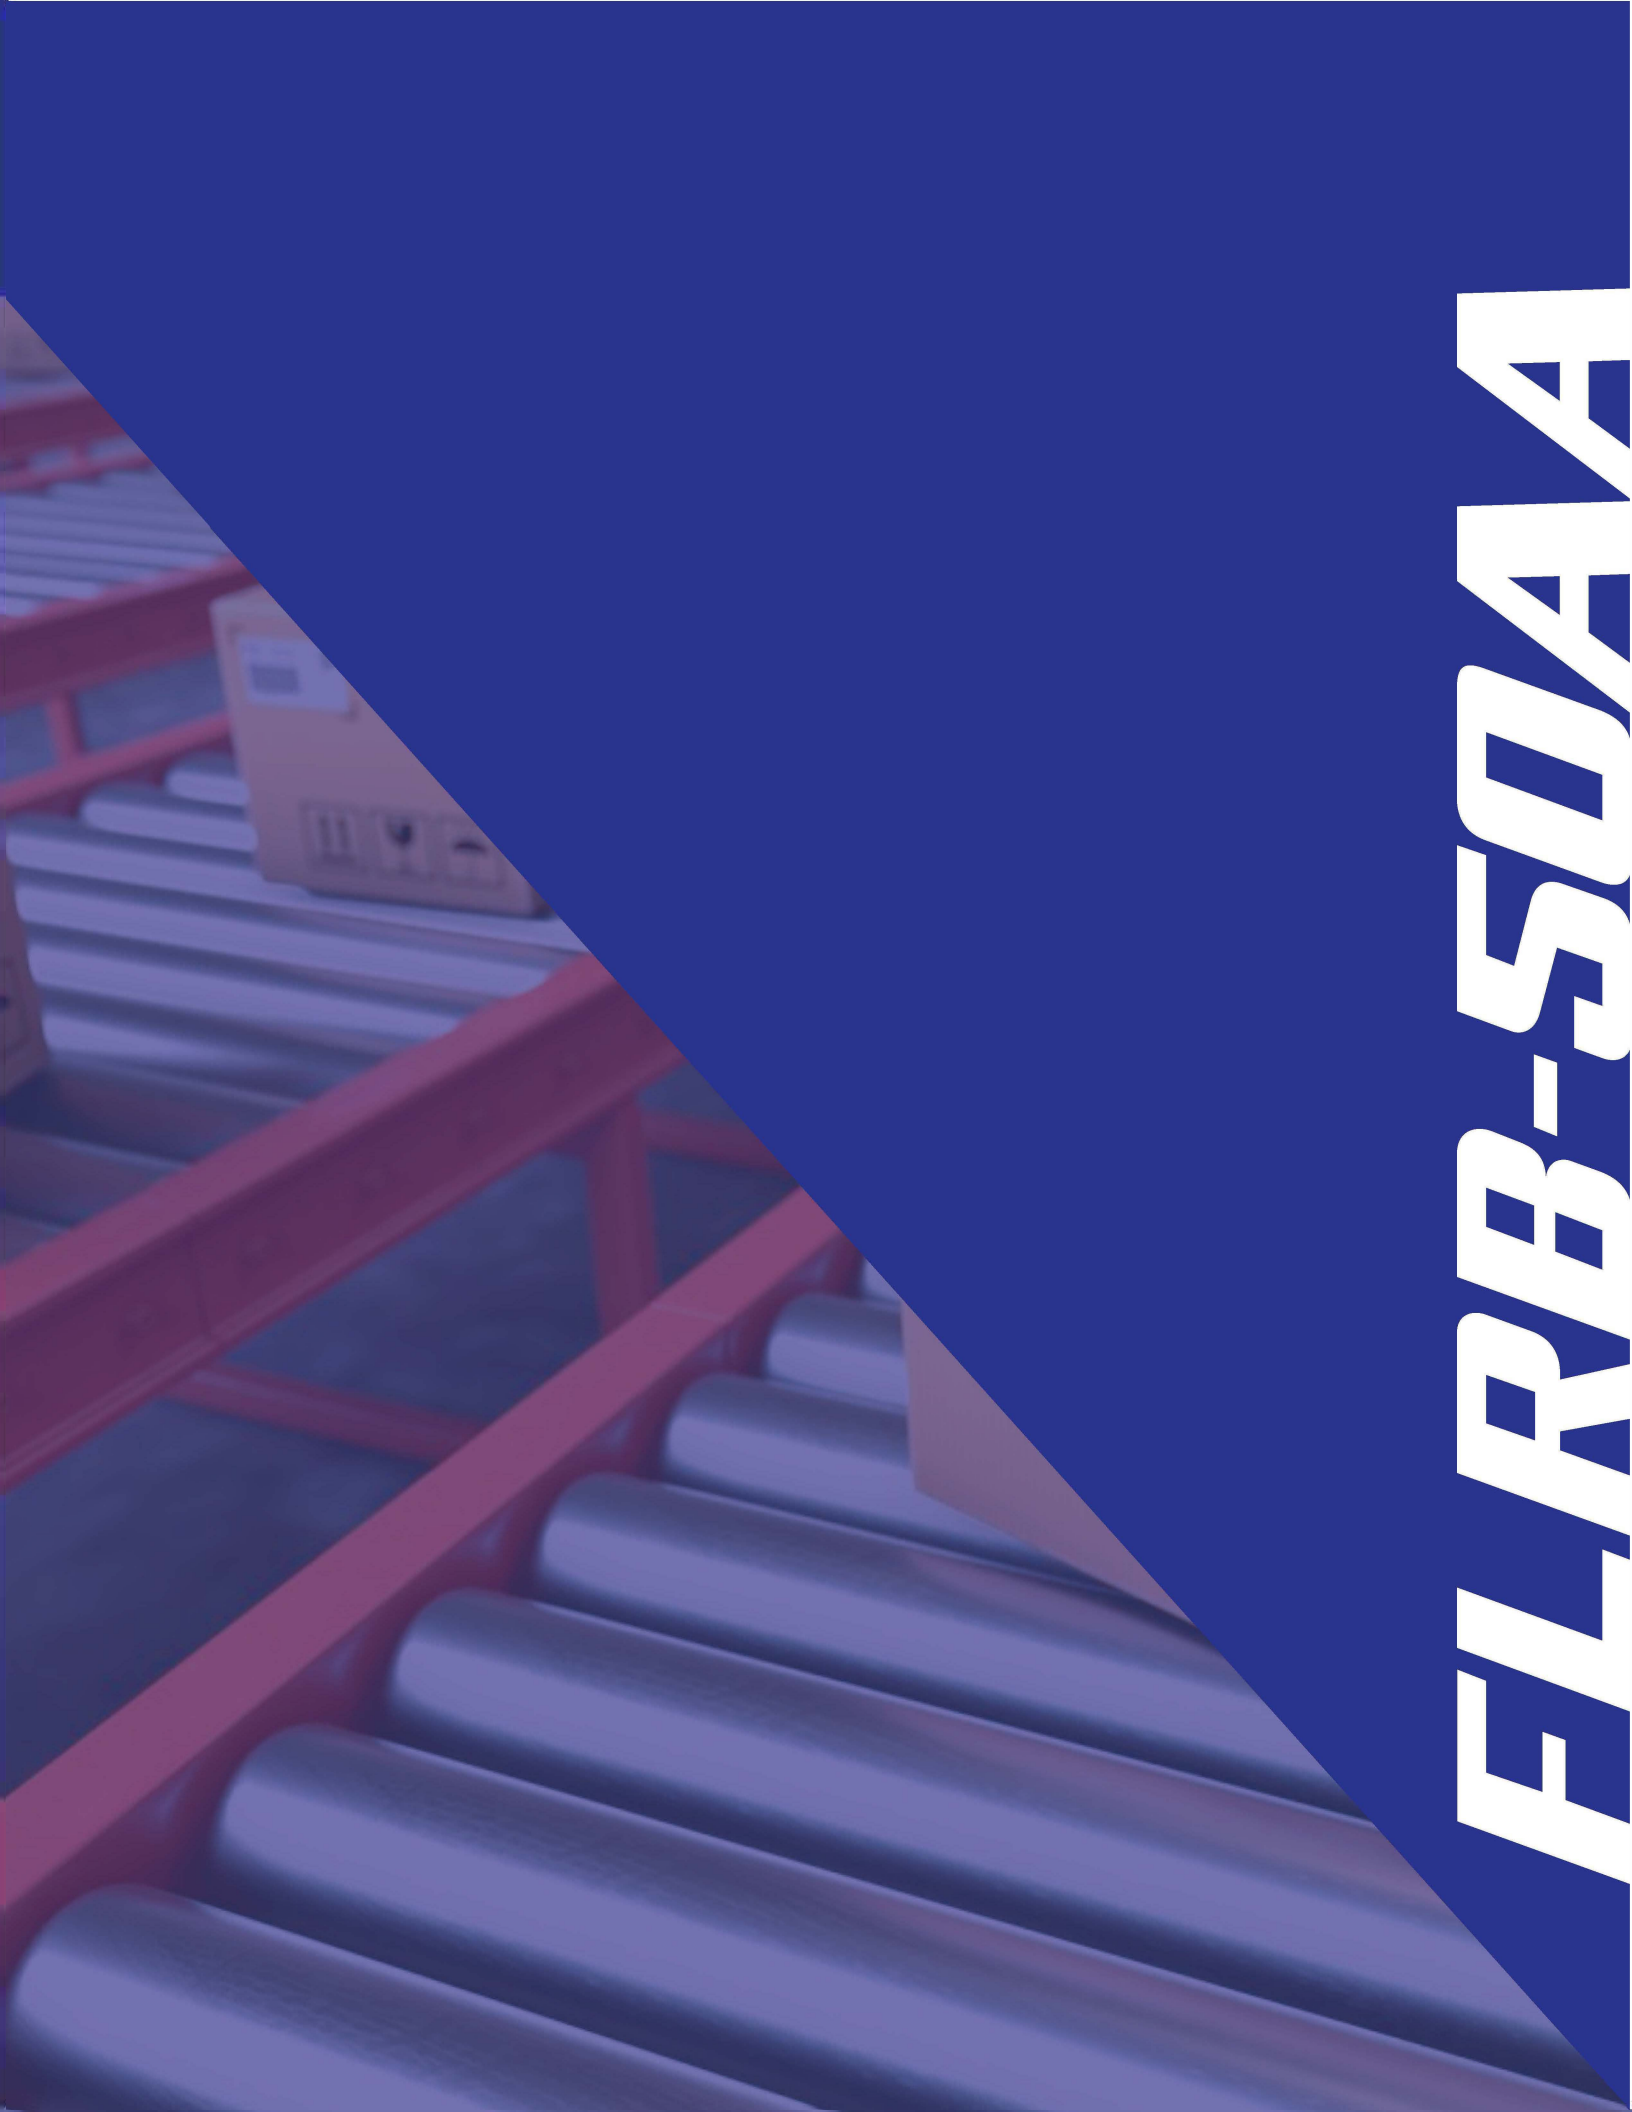

FLRB-50A

FLRB-50AA

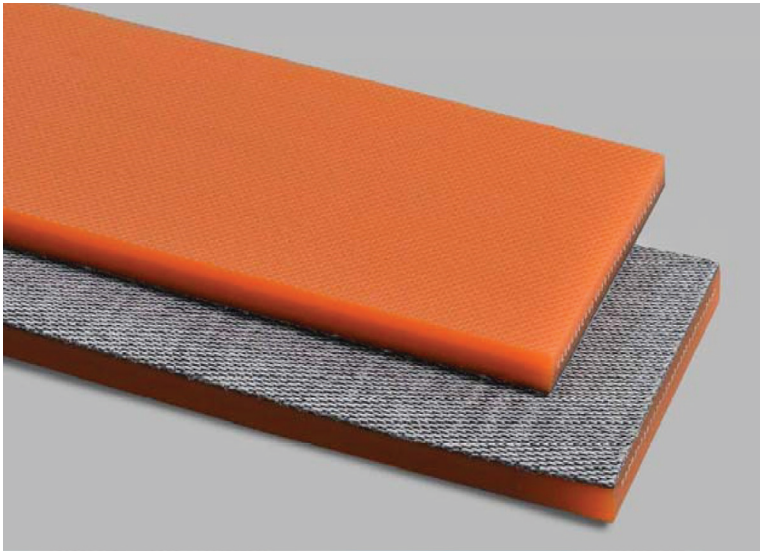

TOP VIEW



BOTTOM VIEW



GAUGE

4.5 mm

BELT WIDTH

45 mm

TOP SURFACE

Orange TPU

BOTTOM SURFACE

Knit Fabric

TENSILE MEMBER

Aramid Cords

TENSILE STRENGTH

500 N/mm

MIN. PULLEY DIAMETER

110 mm

STANDARD ELONGATION

0.5%


ANTI-STATIC

Yes



FUK-3R

FUK-3R

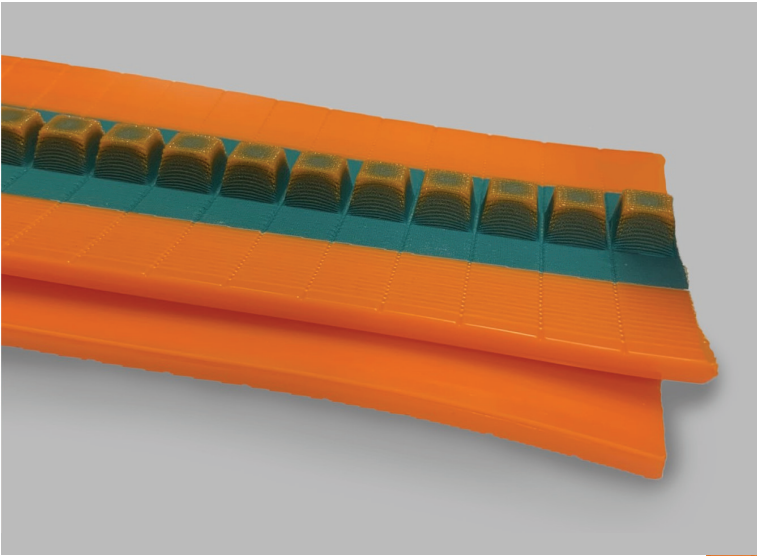

TOP VIEW



BOTTOM VIEW



GAUGE

9.5 mm

BELT WIDTH

3"

TOP SURFACE

Orange TPU

BOTTOM SURFACE

Polyamide Fabric

TENSILE MEMBER

Aramid Cords

TENSILE STRENGTH

526 lbs/in

MIN. PULLEY DIAMETER

60 mm

STANDARD ELONGATION

0.5%

ANTI-STATIC

No

F.N. Sheppard & Co.

Belting Specialties

 www.fnsheppard.com

 1-866-672-6339

 1261 Jamike Ave.
Erlanger, KY 41018

FIND US

1261 Jamike Ave. Erlanger, KY
10924 Granite St. Ste 300 Charlotte, NC
161 Pinnacle Dr. Jackson, TN
10101 Bunsen Way Louisville, KY
4070 State Road 91 Oshkosh, WI

CONTACT US

(859) 525 2358 FAX (859) 525 8467
(704) 295 1040 FAX (704) 295 0145
(731) 427 7440 FAX (731) 423 3013
(502) 499 8599 FAX (502) 499 7330
(920) 233 7070 FAX (920) 233 7202
(859) 653 3857 FAX (856) 384 8415